

SIEMENS Corporation

IPD-West Coast
4800 Old Ironsides Drive, M/S 503
P.O. Box 55075
Santa Clara, CA 95052-8075

PATENT APPLICATION

Attorney Docket No. : 00P7572US
Express Mail Label No. EL485650305US
Date of Deposit : 4-10-2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

TRANSMITTAL LETTER FOR NEW APPLICATION

Sir:

Transmitted herewith for filing is a(n) ☒ [X] Original patent application.
☒ [X] Utility ☐ [] Design ☐ [] Continuation-in-part application

INVENTOR(S): William J. Beyda and Rudolf Bitzinger

TITLE: SYSTEM AND METHOD FOR REINTERPRETING TOS BITS

Enclosed are:


- [X] 12 pages of specification.
[X] 4 sheets of drawings ☐ [] formal drawings ☒ [x] informal drawings (one set)
[X] The Declaration and Power of Attorney ☒ [x] signed ☐ [] unsigned
[X] An Assignment Transmittal and Assignment of the invention to: **SIEMENS
INFORMATION AND COMMUNICATION NETWORKS, INC.**
[X] Information Disclosure Statement, 1449 and ten (10) references.
[X] Filing fee has been calculated as shown below (other than small entity):

For	Number Filed	Number Extra	Rate	Additional Fees
Total Claims	17 - 20	= 0	x \$ 18	\$ 0
Indep. Claims	5 - 3	= 2	x \$ 78	\$156.00
<input type="checkbox"/> [] First Presentation of a Multiple Dependent Claim			x \$260	\$ 0
			Basic filing Fee	\$690.00
			Total	\$846.00

Please charge my Deposit Account No. 19-2179 in the amount of \$846.00. The Commissioner is hereby authorized to charge any fees that may be required, or credit any overpayment to Deposit Account No. 19-2179 pursuant to 37 CFR 1.25. A duplicate copy of this sheet is enclosed.

PLEASE MAIL CORRESPONDENCE TO:
Siemens Corporation
Attn: Elsa Keller, Legal Administrator
Intellectual Property Department
186 Wood Avenue South
Iselin, NJ 08830

Respectfully submitted,



Rosa S. Kim
Reg. No.: 39,728
Date: 4-10-2000
Telephone: (408) 492-4956

"Express Mail" mailing label number EL485650305US

Date of Deposit 4-10-2000

Atty Docket No. 00P7572US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

This is a U.S. Patent Application for:

Title: **SYSTEM AND METHOD FOR REINTERPRETING TOS BITS**

Inventor #1: William J. Beyda
Address: 21580 Edward Way, Cupertino, California 95014
Citizenship: USA

Inventor #2: Rudolf Bitzinger
Address: 1850 Nantucket Circle #247, Santa Clara, California 95054
Citizenship: Austria

Assignee: Siemens Information and Communication Networks, Inc.

SYSTEM AND METHOD FOR REINTERPRETING TOS BITS

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to communications systems and, in particular, to an improved system for providing quality-of-service (QoS) in a Voice over IP (VoIP) system.

DESCRIPTION OF THE RELATED ART

The Internet Protocol (IP) is one of the most popular packet communication and networking protocols being used today. It finds use both on the Internet and in wide area networks (WANs) and local area networks (LANs), such as asynchronous transfer mode (ATM) and Ethernet networks.

- 15 The promise of inexpensive voice telephony using the Internet has led to extensive interest in "Voice over IP" (VoIP) and "Telephony over LAN" (ToL) applications. In particular, several IP telephony protocols have been developed, including the H.323 Recommendation suite of protocols promulgated by the International Telecommunications Union (ITU), the
- 20 Session Initiation Protocol (SIP), and Media Gateway Control Protocol (MGCP), to name a few.

- For example, FIG. 1A illustrates a protocol stack 100a for a conventional H.323 implementation over an Ethernet IP network. One or more application programs 103a interface to the protocol stack 100a. The
- 25 H.323 layer 101a includes a control layer 106 supporting H.245 control signaling for negotiation of media channel usage, Q.931 (H.225.0) for call signaling and call setup, and H.225.0 Registration, Admission and Status (RAS). The H.323 layer 101a may also include a data layer 108 supporting T.120 for data conferencing. The H.323 layer 101a further implements audio
- 30 codecs 102 and may also implement video codecs 104. An RTP/RTCP layer 110 is provided for sequencing the audio and video packets. The H.323 layer 101a employs UDP and TCP 112 as its transport layer, and also employs an IP layer 114, and then, an Ethernet layer 116. Further details concerning the

H.323 Recommendation may be obtained from the International Telecommunications Union; the H.323 Recommendation is hereby incorporated by reference in its entirety as if fully set forth herein.

An important key to the development of ToL and VoIP systems is the development of successful Quality of Service (QoS) IP networks. Generally, QoS refers to the ability of a network to guarantee specific performance levels, related to network bandwidth, availability, jitter, security, and data loss. High voice and/or video quality communication require high QoS levels on all network segments involved in the communication. Guaranteed QoS has been of particular concern on Ethernet LANs, both due to the bursty nature of IP traffic and the CSMA/CD contention protocol used by Ethernet.

Several approaches to QoS in IP networks have employed the Type of Service (TOS) byte, i.e., the second byte, in the IP header. The TOS field is an eight-bit field that signals to routers in the network a priority of handling as well as parameters related to delay, throughput, cost, and reliability. Because the TOS field itself had not been widely used, in certain implementations, it has been recast as a "differentiated service" (DS) byte, which is used to indicate to routers the per-hop behavior expected at the node. These approaches, however, do not in themselves provide a Quality of Service. Other protocols, such as the Resource Reservation Protocol (RSVP) or IEEE 802.1p, are required to implement actual Quality of Service features. Even when the TOS/DS bits are used with such protocols, Quality of Service is not necessarily guaranteed network-wide.

As such, telephony vendors have been developing "Quality of Service Ethernet" (QoSEthernet), which lies between the IP layer and the Ethernet layer in the protocol stack and which provides a guaranteed QoS. Thus, FIG. 1B illustrates a protocol stack 100b including a QoSEthernet layer 115 between the IP layer 114 and the Ethernet layer 116. An exemplary QoSEthernet system is available from Path 1 Network Technologies, Inc., San Diego, California, and makes use of RSVP and the intserv process, described by the Internet Engineering Task Force (IETF).

In practice, implementation of the QoSEthernet layer 115 requires

modified application programs 103b in order to provide the required QoS Ethernet information at call setup. That is, each application program(s) 103b must be modified, or replaced, to provide one or more commands in addition to standard H.323 commands in order to invoke the required QoS.

- 5 Thus, to support QoS Ethernet, a user must not only implement a QoS Ethernet layer but also change applications programs, such as telephone, fax, and the like. Further, each application program requires setup and configuration, which can cause added costs and delays in implementation.

- As such, there is a need for a system to be able to implement
- 10 QoS Ethernet without having to replace existing software systems. There is a still further need for a system to implement QoS Ethernet while using TOS bits to specify the required QoS Ethernet Quality of Service.

SUMMARY OF THE INVENTION

- 15 These and other drawbacks in the prior art are overcome in large part by a system and method according to the present invention. According to one implementation of the present invention, existing software sets TOS bits during IP encapsulation. A Generate QoS Ethernet layer receives the TOS bits and translates them into a form compatible with the QoS Ethernet
- 20 requirements. In a particular implementation, the Generate QoS Ethernet layer is embodied in an H.323 Recommendation telecommunication system.

- According to one implementation of the invention, one or more telephony application programs are provided, along with an H.323 Recommendation stack, an IP layer, and modular Generate QoS Ethernet and
- 25 QoS Ethernet layers. Either the Generate QoS Ethernet layer or the QoS Ethernet layer may be replaced or modified without necessarily having to modify the H.323 Recommendation stack and application program(s).

30

BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the invention is obtained when the following detailed description is considered in conjunction with the following drawings in

which:

FIG. 1A and FIG. 1B illustrate exemplary program stacks according to the prior art;

FIG. 2 is a diagram of an exemplary telecommunications system
5 according to an implementation of the invention;

FIG. 3 is an exemplary program stack according to an implementation of the invention;

FIG. 4 is a diagram of an exemplary generate quality of service Ethernet module according to an implementation of the invention;

10 FIG. 5 illustrates exemplary mapping of type of service bits to QoS Ethernet QoS levels;

FIG. 6 illustrates exemplary mapping of differentiated service bits to QoS Ethernet QoS levels; and

15 FIG. 7 is a flowchart illustrating operation of an implementation of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

FIGs. 2-7 illustrate an improved system and method for providing QoS in an Ethernet-type local area network. Existing software is used to generate
20 TOS (Type of Service) values or DS (Differentiated Service) values when the data packets are encapsulated in the IP. A Generate QoS Ethernet layer is provided that translates the TOS or DS bits into QoS Ethernet-compatible commands. The QoS Ethernet commands are then provided to a QoS Ethernet layer.

25 Turning now to the drawings, and with particular attention to FIG. 2, a diagram illustrating an exemplary IP protocol telecommunications system 300 according to an embodiment of the present invention is shown. In particular, the IP protocol communication system 300 may be embodied as an H.323 Recommendation-compatible system. It is noted that, while described herein
30 with regard to an H.323 network, the invention is equally applicable to any network such as MGCP (Media Gateway Control Protocol), SIP+ (Inter MGS Protocol), SGCP, MEGACO, and generally, any voice or multimedia over IP

scheme. Further, it is noted that an exemplary generic H.323 system is the HiNet™ RC3000 system, available from Siemens.

The telecommunications system 300 includes a local area network (LAN) or packet network 301 and, particularly, an Ethernet LAN. Coupled to the LAN 301 may be a variety of H.323 terminals 302a-d, a multi-point control unit (MCU) 306, an H.323 gateway 308, an H.323 gatekeeper 310, a LAN server 312, and a plurality of other devices such as personal computers (not shown). The H.323 terminals 302a-d are in compliance with the H.323 Recommendation. Further, the H.323 terminals 302a-d include Generate QoS Ethernet controllers or layers 304a-d, as will be described in greater detail below.

More particularly, FIG. 3 illustrates a protocol stack according to an implementation of the invention. At the top are one or more application programs 103a. The application programs 103a, similar to those of FIG. 1A, may be embodied as one or more telephony programs, such as fax, voice, video, and the like. Next is an Internet Protocol voice communication stack, such as an H.323 protocol stack 101a, similar to that of FIG. 1A. Thus, the H.323 stack includes video codecs 102; audio codecs 104; a control layer 106 supporting H.245 control signaling for negotiation of media channel usage, Q.931 (H.225.0) for call signaling and call setup, and H.225.0 Registration, Admission and Status (RAS); a data layer 108 supporting T.120 for data conferencing; and an RTP/RTCP layer 110. The Internet Protocol voice communication stack 101a lies atop a UDP/TCP layer 112 and an IP layer 114. The application programs 103a are adapted to generate commands which are encapsulated in the second byte of the IP header as type of service (TOS) or differentiated service (DS) bits.

Also included are a QoS Ethernet layer 115 and an Ethernet layer 116. Further, a Generate QoS Ethernet layer 118 according to the present invention is provided. As will be described in greater detail below, the Generate QoS Ethernet layer 118 intercepts the second byte of the IP header, derives a required QoS therefrom, and generates the appropriate QoS commands for the QoS Ethernet layer 115.

Turning now to FIG. 4, an exemplary Generate QoS Ethernet module 304 is illustrated in greater detail. The Generate QoS Ethernet module 304 includes a control unit 402 coupled to a memory 404. The memory 404 includes one or more lookup tables or databases 406 for storing conversions
 5 between TOS or DS bits and QoS Ethernet commands, as will be explained in greater detail below. Also included is a buffer unit 408, including an input buffer 410 and an output buffer 412. The input buffer 410 receives the TOS or DS bits and buffers them during access of the lookup table 406. The TOS and DS bits are then transferred to the output buffer 412 and the appropriate
 10 QoS commands are generated. The commands are then output from the output buffer to the QoS Ethernet.

Turning now to FIG. 5, a diagram illustrating the principle of mapping of the TOS bits to QoS Ethernet commands is shown. FIG. 5 illustrates an exemplary TOS byte 502, a Generate QoS Ethernet map module 304a, and a
 15 QoS level mapped-to table 504. As is known, the first six bits of the Type of Service byte are used to define levels of service, ranging from "routine" to "critical." The Generate QoS Ethernet layer 304a according to the present invention reads the defined TOS bits and maps them to corresponding QoS Ethernet QoS levels.

FIG. 6 is a similar diagram of the differentiated service byte mapping. Shown is a Differentiated Service byte 602, an exemplary Generate QoS Ethernet layer map 304b, and a resulting QoS level table 604. Bits 6-7 are
 20 presently unused; bits 0-5 are presently used to define "per hop behavior," i.e., a particular forwarding treatment at each node. The Generate QoS Ethernet layer 304b reads the DS byte 602 and maps the bits to a QoS Ethernet quality of service level.

Operation of an implementation of the present invention is illustrated more clearly with reference to the flowchart of FIG. 7. In a step 702, the client terminal begins a call. In a step 704, the corresponding messages are
 30 encapsulated in IP packets. In a step 706, the second byte of the IP header is set according to predefined QoS levels. As discussed above, the second byte may be either a Type of Service byte or a Differentiated Service byte. In a

5 Ethernet commands to establish the specified quality of service.

10

WHAT IS CLAIMED IS:

- 1 1. A telecommunications system, comprising:
 - 2 an Ethernet-type local area network; and
 - 3 one or more telecommunications devices coupled to said Ethernet-type local
 - 4 area network, said one or more telecommunications devices including:
 - 5 an Internet Protocol voice communication stack;
 - 6 a Quality of Service Ethernet layer; and
 - 7 a Generate Quality of Service Ethernet layer interposed between said
 - 8 Internet Protocol voice communication stack and said Quality of Service
 - 9 Ethernet layer and adapted to intercept a second byte in an IP header, identify
 - 10 from said second byte a quality of service required for individual calls, and
 - 11 generate corresponding Quality of Service commands to said Quality of
 - 12 Service Ethernet layer.
- 1 2. A telecommunications system in accordance with claim 1, said second
 - 2 byte comprising a Type of Service byte.
- 1 3. A telecommunications system in accordance with claim 1, said second
 - 2 byte comprising a Differentiated Service byte.
- 1 4. A telecommunications system in accordance with claim 2,
 - 2 wherein said Quality of Service Ethernet layer and said Generate
 - 3 Quality of Service Ethernet layer are modular.
- 1 5. A telecommunications system in accordance with claim 3,
 - 2 wherein said Quality of Service Ethernet layer and said Generate
 - 3 Quality of Service Ethernet layer are modular.
- 1 6. A telecommunications device adapted to be coupled to an Ethernet-
 - 2 type local area network, comprising:
 - 3 an Internet Protocol voice communication stack;

4 a Quality of Service Ethernet layer; and
5 a Generate Quality of Service Ethernet layer interposed between said Internet
6 Protocol voice communication stack and said Quality of Service Ethernet layer and
7 adapted to intercept a second byte in an IP header, identify from said second byte a
8 quality of service required for individual calls, and generate corresponding Quality of
9 Service commands to said Quality of Service Ethernet layer.

1 7. A telecommunications device in accordance with claim 6, said second
2 byte comprising a Type of Service byte.

1 8. A telecommunications device in accordance with claim 6, said second
2 byte comprising a Differentiated Service byte.

1 9. A telecommunications device in accordance with claim 7, wherein said
2 Quality of Service Ethernet layer and said Generate Quality of Service Ethernet layer
3 are modular.

1 10. A telecommunications device in accordance with claim 8, wherein said
2 Quality of Service Ethernet layer and said Generate Quality of Service Ethernet layer
3 are modular.

1 11. A method comprising:
2 intercepting a second byte from an Internet Protocol header;
3 identifying from said second byte a quality of service required for individual
4 calls; and
5 generating corresponding Quality of Service commands to a Quality of
6 Service Ethernet layer.

1 12. A method, comprising:
2 beginning an IP multimedia call;
3 encapsulating corresponding messages for said IP multimedia call in IP
4 protocol data packets;

5 setting a second byte of an IP header for said IP protocol data packets;
 6 reading said second byte before said IP protocol data packets are sent over a
 7 network;
 8 accessing a lookup table, said lookup table containing entries for mapping
 9 said second byte to QoS Ethernet quality of service commands;
 10 sending said QoS Ethernet quality of service commands to a QoS Ethernet
 11 layer; and
 12 sending said IP protocol data packets over an Ethernet network using said
 13 quality of service.

1 13. A method according to claim 12, wherein said second byte comprises a type
 2 of service byte.

1 14. A method according to claim 12, said second byte comprising a differentiated
 2 service byte.

1 15. A system, comprising:
 2 means for beginning an IP multimedia call;
 3 means for encapsulating corresponding messages for said IP multimedia call
 4 in IP protocol data packets;
 5 means for setting a second byte of an IP header for said IP protocol data
 6 packets;
 7 means for reading said second byte before said IP protocol data packets are
 8 sent over a network;
 9 means for accessing a lookup table, said lookup table containing entries for
 10 mapping said second byte to QoS Ethernet quality of service commands;
 11 means for sending said QoS Ethernet quality of service commands to a QoS
 12 Ethernet layer; and
 13 means for sending said IP protocol data packets over an Ethernet network
 14 using said quality of service.

1 16. A system according to claim 15, wherein said second byte comprises a type

2 of service byte.

- 1 17. A system according to claim 15, said second byte comprising a differentiated
- 2 service byte.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

A system and method for providing Quality of Service in an Ethernet network.

One or more telephony application programs are provided, along with an H.323

5 Recommendation stack, an IP layer, and modular Generate QoS Ethernet and QoS Ethernet layers. The Generate QoS Ethernet layer is adapted to read Type of Service or Differentiated Service bytes and generate desired QoS Ethernet commands therefrom. Either the Generate QoS Ethernet layer or the QoS Ethernet layer may be replaced or modified without necessarily having to modify the H.323

10 Recommendation stack and application program(s).

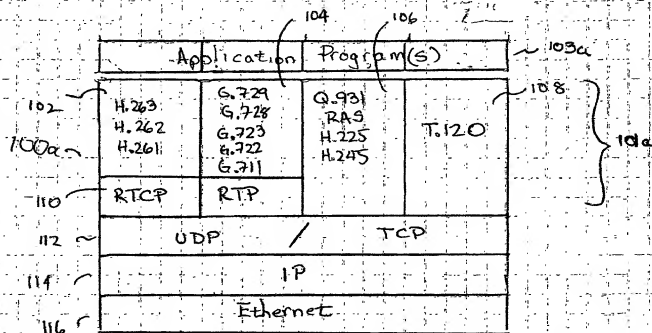


Fig. 1A (Prior Art)

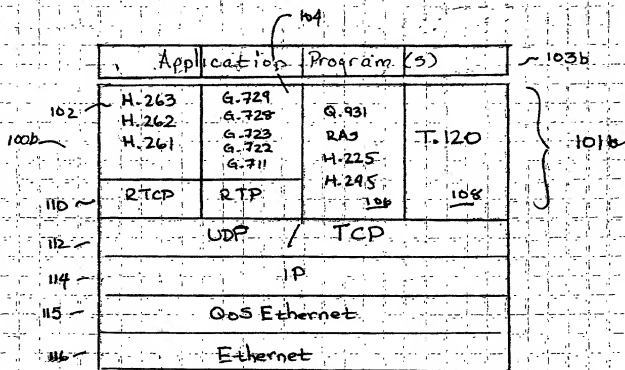


Fig. 1B (Prior Art)

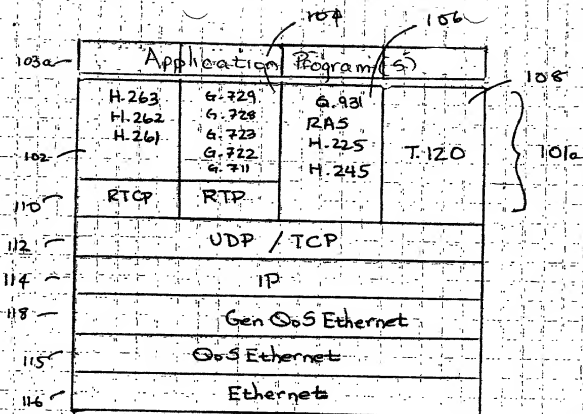


FIG. 3


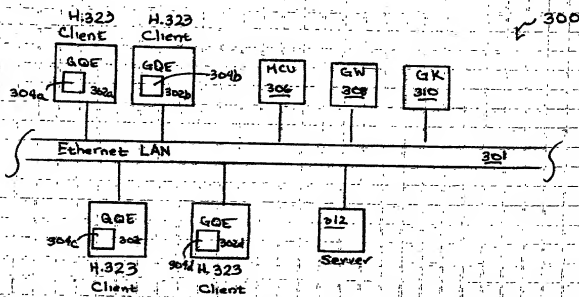


FIG. 2

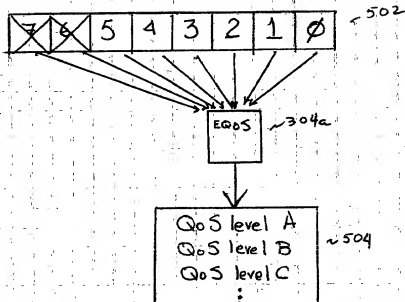

- 0 Routine
- 1 Priority
- 2 Immediate
- 3 Flash
- 4 Flash override
- 5 Critical
- 6 N/D
- 7 N/D

FIG. 5



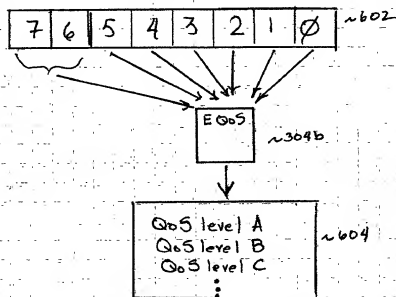


FIG. 6

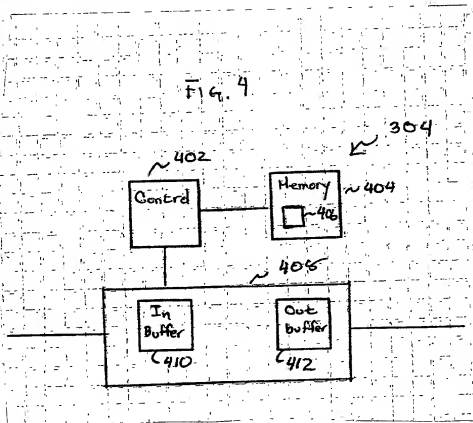

DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEM AND METHOD FOR REINTERPRETING TOS BITS

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as Application Serial No.

and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Codes, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Priority claimed

(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No

I hereby claim the benefits under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing date)	(Status)
		(patented,pending,abandoned)

(Application Serial No.)	(Filing date)	(Status)
		(patented,pending,abandoned)

Power of Attorney: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Adel A. Ahmed, Reg. No. 29,606; Stanton C. Braden, Reg. No. 32,556; Robert T. Canavan, Reg. No. 37,592; Dexter K. Chin, Reg. No. 38,842; Joseph S. Codispoli, Reg. No. 31,819; Lawrence C. Edelman, Reg. No. 29,299; Mark H. Jay, Reg. No. 27,507; Stuart P. Kaler, Reg. No. 35,913; Rosa S. Kim, Reg. No. 39,728; Peter A. Luccarelli, Jr., Reg. No. 29,750; Jeffrey P. Morris, Reg. No. 25,307; Donald B. Paschburg, Reg. No. 33,753; Darryl A. Smith, Reg. No. 37,723; Heather S. Vance, Reg. No. 39,033; Scott T. Weingaertner, Reg. No. 37,756; Robert A. Whitman, Reg. No. 36,966; and Ira Lee Zebrak, Reg. No. 31,147.

Send correspondence to:

Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, N.J. 08830

Direct telephone calls to:

Elsa Keller
Legal Administrator (908) 321-3026

I hereby declare that all statements made herein on my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false

statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of
joint inventor:

William J. Beyda

Inventor's
signature:

William J. Beyda

Date:

4/7/00

Residence:

Cupertino, CA 95014

Citizenship:

USA

Post Office
Address:

21580 Edward Way, Cupertino, CA 95014

Full name of
joint inventor:

Rudolf Bitzinger

Inventor's
signature:

R. Bitzinger

Date:

4/7/00

Residence:

Santa Clara, CA 95054

Citizenship:

Austria

Post Office
Address:

1850 Nantucket Circle #247, Santa Clara, CA 95014